

VF21BS

500 lt/min @ 0.6 Mpa (6 Bar)
250 lt/min @ 0.8 Mpa (8 Bar)


- The quietest in TOHATSU fire pump at 62 dBA
- TOHATSU's smallest 4-stroke fire pump
- Easy to handle with its simplicity, portability & straight forward usage
- Designed for easy & smooth operation



SPECIFICATIONS

MODEL	VF21BS
Type Engine	4 Cycle
Number of Cylinder	2 Cylinder
Cooling System	Suction Water Cooled
Bore x Stroke	55 x 44 mm
Piston Displacement	209cc (12,7 cu in)
Output	7.3 kW (10PS)
Full Type	Unleaded Gasoline (Min. 87 Octane)
Fuel Tank Capacity	4.3 Lit (1.14 gal)
Fuel Consumption	3.9 Lit / Hr (1.03 gal / Hr)
Fuel System	Single Carburetor
Oil Tank Capacity	1 Lit (0.26 gal)
Suction Starting	Electric & Manual
Suction System	4 Blade Rotary Vane Vacuum Pump (Oil-less type)
Priming System	Semi Auto priming
Pump Type	Single Suction, Single Stage Centrifugal Pump
Suction Thread and Dia.	JIS 2 1/2" and BSP 2 1/2"
Discharge Thread and Dia.	JIS 2 1/2" and BSP 2 1/2"
Discharge Number	Single
Discharge Valve	Ball
Dry Weight	52 kg
Wet Weight	57 kg
Dimension (mm)	480 x 590 x 560

Performance Curve

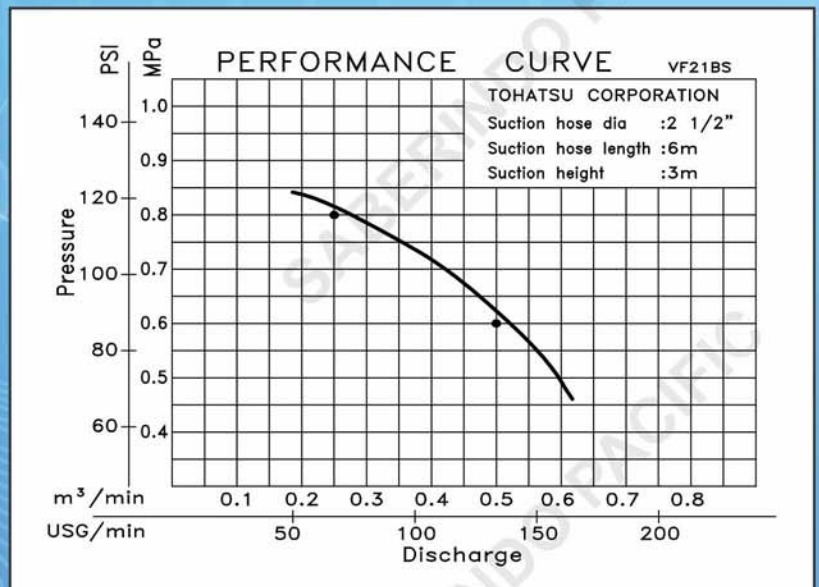

AUTHORIZED DISTRIBUTOR AND SERVICE CENTER :
PT. SABERINDO PACIFIC
Kompleks Mega Grosir Cempaka Mas
Blok J No. 10 Jl. Letjend. Suprpto, Jakarta 10640
Jakarta - Indonesia
Telp : +62 21 4288 8282 (Hunting)
Fax : +62 21 4287 2323
Website : www.saberindo.co.id
Email : info@saberindo.co.id