



# TOHATSU

## PORTABLE FIRE PUMPS

### VC72AS

1.550 lt/min @ 0.6 Mpa (6 Bar)  
 1.300 lt/min @ 0.8 Mpa (8 Bar)  
 950 lt/min @ 1.0 Mpa (10 Bar)


- 90 degree swinging twin outlet
- Engine overheat protection sensor
- Easy maintenance



## SPECIFICATIONS

MODEL	VC72AS
Type Engine	2 Cycle
Number of Cylinder	2 Cylinder
Cooling System	Suction Water Cooled
Bore x Stroke	76 x 68 mm (2.99 x 2.68 inci)
Piston Displacement	617cc (37.6 cu in)
Output	30 kW (40.8PS)
Full Type	Unleaded Gasoline (Min. 87 Octane)
Fuel Tank Capacity	18 Lit (4.76 gal)
Fuel Consumption	13 Lit / Hr (3.43 gal / Hr)
Fuel System	Single carburetor with Auto choke
Oil Tank Capacity	1.6 Lit (0.42 gal)
Suction Starting	Electric & Manual
Suction System	4 Blade Rotary Vane Vacuum Pump (Oil-less type)
Priming System	Semi-Auto priming
Pump Type	Single Suction, Single Stage Centrifugal Pump
Suction Thread and Dia.	JIS 3" and BSP 4"
Discharge Thread and Dia.	JIS 2½" and BSP 2½"
Discharge Number	Single
Discharge Valve	Flat
Dry Weight	85 kg
Wet Weight	101 kg
Dimension (mm)	700 x 620 x 730

### Performance Curve

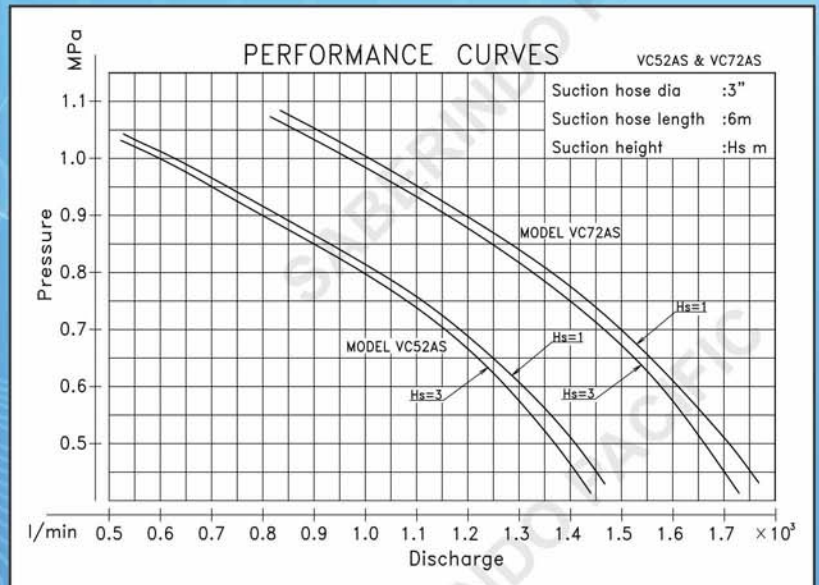

**AUTHORIZED DISTRIBUTOR AND SERVICE CENTER :**  
**PT. SABERINDO PACIFIC**  
 Kompleks Mega Grosir Cempaka Mas  
 Blok J No. 10 Jl. Letjend. Suprpto, Jakarta 10640  
 Jakarta - Indonesia  
 Telp : +62 21 4288 8282 (Hunting)  
 Fax : +62 21 4287 2323  
 Website : [www.saberindo.co.id](http://www.saberindo.co.id)  
 Email : [info@saberindo.co.id](mailto:info@saberindo.co.id)

